



Synthetic Lubricants and Filters, Inc. Food-Grade Heat Transfer Fluid



Heat Transfer Fluids

SLFi Food-Grade Heat Transfer Fluid is formulated to meet HT-1 food grade requirements without compromising performance or fluid life. It utilizes clear base fluids that are free from the impurities and aromatic compounds common in many competitive heat transfer formulations. SLFi Food-Grade Heat Transfer Fluid is rated for applications up to 621° F (327° C).

Applications

- Closed and open loop systems with a maximum bulk temperature of 621°F (327°C)
- Food-grade systems

Performance Advantages

- **NSF HT-1 registered**
Ideal for food-processing applications
- **Low varnishing tendencies**
Allows for clean operation and greater thermal transfer efficiency
- **Ideal for food-processing applications**
- **Minimal odor**

Temperature Range



Typical Properties

Minimum Temperature, °F (°C)	32 (0)
Maximum Film Temperature, °F (°C)	669 (354)
Maximum Bulk Temperature, °F (°C)	621 (327)
Pour Point, °F (°C)	1 (-17)
Flash Point, °F (°C)	441 (227)
Fire Point, °F (°C)	466 (241)
Autoignition Point, °F (°C)	682 (361)
Thermal Expansion Coefficient, %/°C	0.1016
Thermal Conductivity @ 38°C, W/m-K	0.143
Thermal Conductivity @ 260°C, W/m-K	0.130
Heat Capacity @ 38°C, kJ/kg-K	1.972
Heat Capacity @ 260°C, kJ/kg-K	2.699
Distillation Range (ASTM D2887), 10% °C	383
Distillation Range, 90%	494
Average Molecular Weight	395

Fluid properties are typical results and should not serve as a sole resource for determining the correct fluid for a particular application. Please consult an Isef representative to ensure that the product is the correct choice for the application.


toll-free: 1-855-215-2740
phone: 318-779-0682

email: mike@slfi.net
web: www.slfi.net




Synthetic Lubricants and Filters, Inc. Food-Grade Heat Transfer Fluid


Density

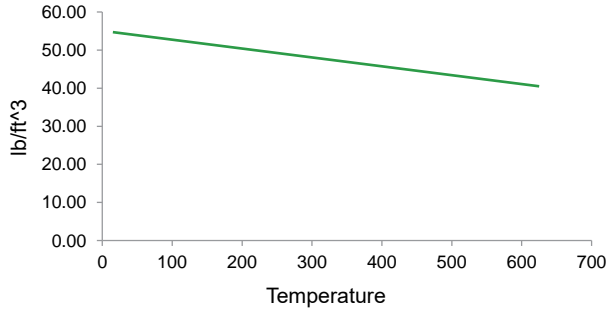


Thermal Conductivity

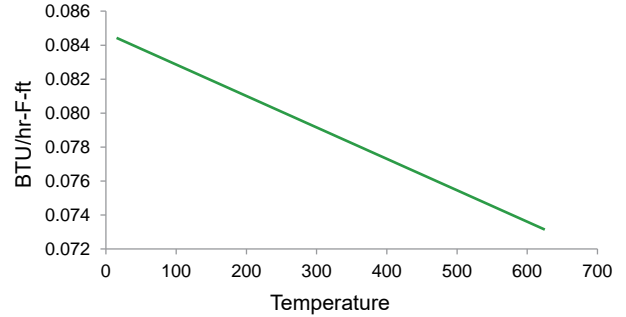


Kinematic Viscosity

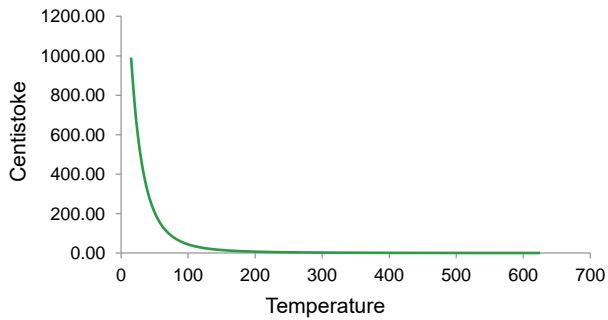


Heat Capacity

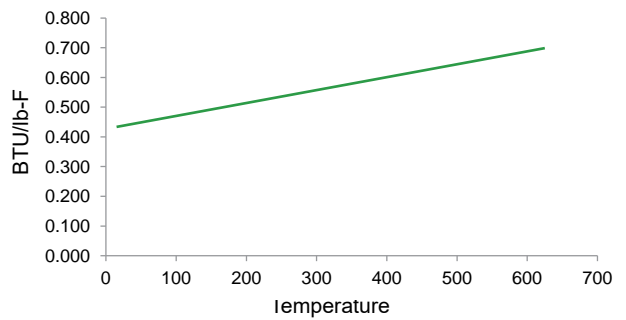

Dynamic Viscosity

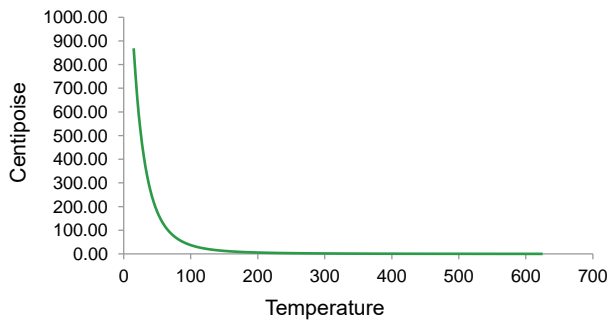

Vapor Pressure

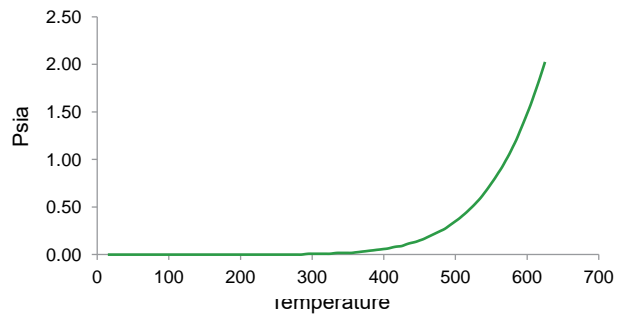

**Synthetic Lubricants and Filters, Inc., 7401 University Drive, Shreveport, LA 71105
800-215-2740 • www.sffi.net**

Fluid properties are typical results and should not serve as a sole resource for determining the correct fluid for a particular application. Please consult an Isel representative to ensure that the product is the correct choice for the application.



Synthetic Lubricants and Filters, Inc.

Food-Grade Heat Transfer Fluid

Temperature (°F)	Density (lb/ft ³)	Kinematic Viscosity (Centistoke)	Dynamic Viscosity (Centipoise)	Thermal Conductivity (BTU/hr-F-ft)	Heat Capacity (BTU/lb-F)	Vapor Pressure (Psia)
15	54.72	990.22	868.44	0.084	0.433	0.00
20	54.60	766.65	670.93	0.084	0.436	0.00
25	54.48	600.69	524.57	0.084	0.438	0.00
30	54.37	475.98	414.77	0.084	0.440	0.00
35	54.25	381.18	331.45	0.084	0.442	0.00
40	54.13	308.34	267.54	0.084	0.444	0.00
45	54.02	251.79	218.00	0.084	0.446	0.00
50	53.90	207.45	179.22	0.084	0.449	0.00
55	53.78	172.37	148.59	0.084	0.451	0.00
60	53.67	144.37	124.18	0.084	0.453	0.00
65	53.55	121.83	104.57	0.084	0.455	0.00
70	53.43	103.55	88.68	0.083	0.457	0.00
75	53.32	88.60	75.72	0.083	0.459	0.00
80	53.20	76.30	65.06	0.083	0.462	0.00
85	53.08	66.11	56.25	0.083	0.464	0.00
90	52.97	57.60	48.90	0.083	0.466	0.00
95	52.85	50.47	42.75	0.083	0.468	0.00
100	52.73	44.44	37.57	0.083	0.470	0.00
105	52.62	39.33	33.17	0.083	0.473	0.00
110	52.50	34.97	29.43	0.083	0.475	0.00
115	52.38	31.23	26.22	0.083	0.477	0.00
120	52.27	28.00	23.46	0.082	0.479	0.00
125	52.15	25.21	21.07	0.082	0.481	0.00
130	52.03	22.78	19.00	0.082	0.483	0.00
135	51.92	20.66	17.19	0.082	0.486	0.00
140	51.80	18.80	15.61	0.082	0.488	0.00
145	51.68	17.17	14.22	0.082	0.490	0.00
150	51.57	15.72	13.00	0.082	0.492	0.00
155	51.45	14.44	11.91	0.082	0.494	0.00
160	51.33	13.30	10.95	0.082	0.496	0.00
165	51.22	12.29	10.09	0.082	0.499	0.00
170	51.10	11.38	9.32	0.082	0.501	0.00
175	50.98	10.56	8.63	0.081	0.503	0.00
180	50.87	9.83	8.01	0.081	0.505	0.00
185	50.75	9.16	7.45	0.081	0.507	0.00
190	50.63	8.56	6.95	0.081	0.509	0.00
195	50.52	8.02	6.49	0.081	0.512	0.00
200	50.40	7.52	6.08	0.081	0.514	0.00

Synthetic Lubricants and Filters, Inc., 7401 University Drive, Shreveport, LA 71105 800-215-2740 • www.slfi.net

Fluid properties are typical results and should not serve as a sole resource for determining the correct fluid for a particular application. Please consult an Isel representative to ensure that the product is the correct choice for the application. Revised 11/2017 - S



Synthetic Lubricants and Filters, Inc.

Food-Grade Heat Transfer Fluid

Temperature (°F)	Density (lb/ft ³)	Kinematic Viscosity (Centistoke)	Dynamic Viscosity (Centipoise)	Thermal Conductivity (BTU/hr-F-ft)	Heat Capacity (BTU/lb-F)	Vapor Pressure (Psia)
205	50.28	7.07	5.70	0.081	0.516	0.00
210	50.17	6.66	5.35	0.081	0.518	0.00
215	50.05	6.28	5.04	0.081	0.520	0.00
220	49.93	5.93	4.75	0.081	0.523	0.00
225	49.82	5.61	4.48	0.081	0.525	0.00
230	49.70	5.32	4.24	0.080	0.527	0.00
235	49.58	5.05	4.01	0.080	0.529	0.00
240	49.47	4.80	3.80	0.080	0.531	0.00
245	49.35	4.56	3.61	0.080	0.533	0.00
250	49.23	4.35	3.43	0.080	0.536	0.00
255	49.12	4.15	3.27	0.080	0.538	0.00
260	49.00	3.96	3.11	0.080	0.540	0.00
265	48.88	3.79	2.97	0.080	0.542	0.00
270	48.77	3.63	2.83	0.080	0.544	0.00
275	48.65	3.47	2.71	0.080	0.546	0.00
280	48.53	3.33	2.59	0.080	0.549	0.00
285	48.42	3.20	2.48	0.079	0.551	0.00
290	48.30	3.08	2.38	0.079	0.553	0.01
295	48.18	2.96	2.29	0.079	0.555	0.01
300	48.07	2.85	2.19	0.079	0.557	0.01
305	47.95	2.75	2.11	0.079	0.559	0.01
310	47.83	2.65	2.03	0.079	0.562	0.01
315	47.72	2.56	1.95	0.079	0.564	0.01
320	47.60	2.47	1.88	0.079	0.566	0.01
325	47.48	2.39	1.82	0.079	0.568	0.01
330	47.37	2.31	1.75	0.079	0.570	0.01
335	47.25	2.24	1.69	0.079	0.572	0.02
340	47.13	2.17	1.64	0.078	0.575	0.02
345	47.02	2.10	1.58	0.078	0.577	0.02
350	46.90	2.04	1.53	0.078	0.579	0.02
355	46.78	1.98	1.48	0.078	0.581	0.02
360	46.67	1.92	1.44	0.078	0.583	0.02
365	46.55	1.87	1.39	0.078	0.586	0.03
370	46.43	1.81	1.35	0.078	0.588	0.03
375	46.32	1.76	1.31	0.078	0.590	0.04
380	46.20	1.72	1.27	0.078	0.592	0.04
385	46.08	1.67	1.24	0.078	0.594	0.05
390	45.97	1.63	1.20	0.077	0.596	0.05

Synthetic Lubricants and Filters, Inc., 7401 University Drive, Shreveport, LA 71105 800-215-2740 • www.slfi.net

Fluid properties are typical results and should not serve as a sole resource for determining the correct fluid for a particular application. Please consult an Isel representative to ensure that the product is the correct choice for the application. Revised 11/2017 - S



Synthetic Lubricants and Filters, Inc.

Food-Grade Heat Transfer Fluid

Temperature (°F)	Density (lb/ft ³)	Kinematic Viscosity (Centistoke)	Dynamic Viscosity (Centipoise)	Thermal Conductivity (BTU/hr-F-ft)	Heat Capacity (BTU/lb-F)	Vapor Pressure (Psia)
395	45.85	1.59	1.17	0.077	0.599	0.05
400	45.73	1.55	1.14	0.077	0.601	0.06
405	45.62	1.51	1.11	0.077	0.603	0.06
410	45.50	1.48	1.08	0.077	0.605	0.07
415	45.38	1.44	1.05	0.077	0.607	0.08
420	45.27	1.41	1.02	0.077	0.609	0.09
425	45.15	1.38	1.00	0.077	0.612	0.09
430	45.03	1.35	0.97	0.077	0.614	0.10
435	44.92	1.32	0.95	0.077	0.616	0.12
440	44.80	1.29	0.93	0.077	0.618	0.13
445	44.68	1.26	0.91	0.076	0.620	0.14
450	44.57	1.24	0.88	0.076	0.622	0.15
455	44.45	1.21	0.86	0.076	0.625	0.16
460	44.33	1.19	0.84	0.076	0.627	0.18
465	44.22	1.17	0.83	0.076	0.629	0.20
470	44.10	1.14	0.81	0.076	0.631	0.22
475	43.98	1.12	0.79	0.076	0.633	0.23
480	43.87	1.10	0.77	0.076	0.636	0.25
485	43.75	1.08	0.76	0.076	0.638	0.27
490	43.63	1.06	0.74	0.076	0.640	0.30
495	43.52	1.04	0.73	0.076	0.642	0.32
500	43.40	1.03	0.71	0.075	0.644	0.35
505	43.28	1.01	0.70	0.075	0.646	0.38
510	43.17	0.99	0.69	0.075	0.649	0.41
515	43.05	0.98	0.67	0.075	0.651	0.44
520	42.93	0.96	0.66	0.075	0.653	0.48
525	42.82	0.94	0.65	0.075	0.655	0.51
530	42.70	0.93	0.64	0.075	0.657	0.55
535	42.58	0.92	0.62	0.075	0.659	0.60
540	42.47	0.90	0.61	0.075	0.662	0.64
545	42.35	0.89	0.60	0.075	0.664	0.69
550	42.23	0.88	0.59	0.075	0.666	0.75
555	42.12	0.86	0.58	0.074	0.668	0.80
560	42.00	0.85	0.57	0.074	0.670	0.86
565	41.88	0.84	0.56	0.074	0.672	0.92
570	41.77	0.83	0.55	0.074	0.675	0.99
575	41.65	0.82	0.54	0.074	0.677	1.05
580	41.53	0.80	0.54	0.074	0.679	1.13

Synthetic Lubricants and Filters, Inc., 7401 University Drive, Shreveport, LA 71105 800-215-2740 • www.slfi.net

Fluid properties are typical results and should not serve as a sole resource for determining the correct fluid for a particular application. Please consult an Isel representative to ensure that the product is the correct choice for the application. Revised 11/2017 - S



Synthetic Lubricants and Filters, Inc. Food-Grade Heat Transfer Fluid

Temperature (°F)	Density (lb/ft ³)	Kinematic Viscosity (Centistoke)	Dynamic Viscosity (Centipoise)	Thermal Conductivity (BTU/hr-F-ft)	Heat Capacity (BTU/lb-F)	Vapor Pressure (Psia)
585	41.42	0.79	0.53	0.074	0.681	1.21
590	41.30	0.78	0.52	0.074	0.683	1.30
595	41.18	0.77	0.51	0.074	0.685	1.39
600	41.07	0.76	0.50	0.074	0.688	1.48
605	40.95	0.76	0.50	0.074	0.690	1.58
610	40.83	0.75	0.49	0.073	0.692	1.69
615	40.72	0.74	0.48	0.073	0.694	1.79
620	40.60	0.73	0.47	0.073	0.696	1.91
625	40.48	0.72	0.47	0.073	0.699	2.03

Synthetic Lubricants and Filters, Inc., 7401 University Drive, Shreveport, LA 71105
800-215-2740 • www.slfi.net

Fluid properties are typical results and should not serve as a sole resource for determining the correct fluid for a particular application. Please consult an Isel representative to ensure that the product is the correct choice for the application. Revised 11/2017 - S

All products manufactured in the USA